
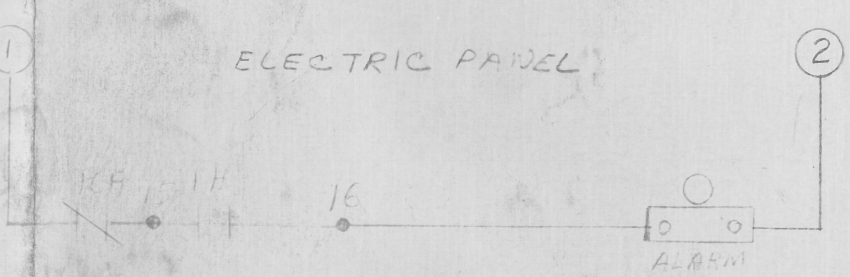
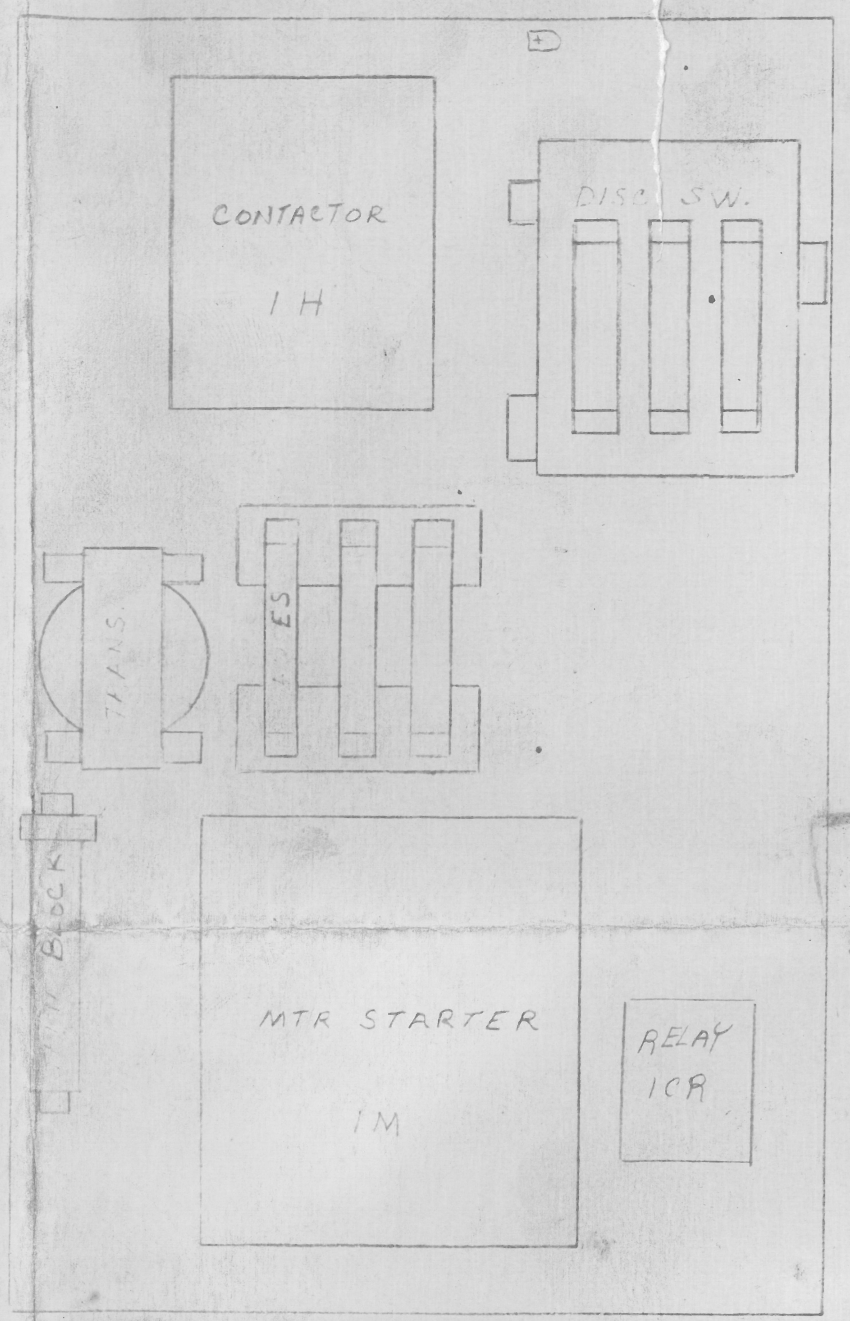
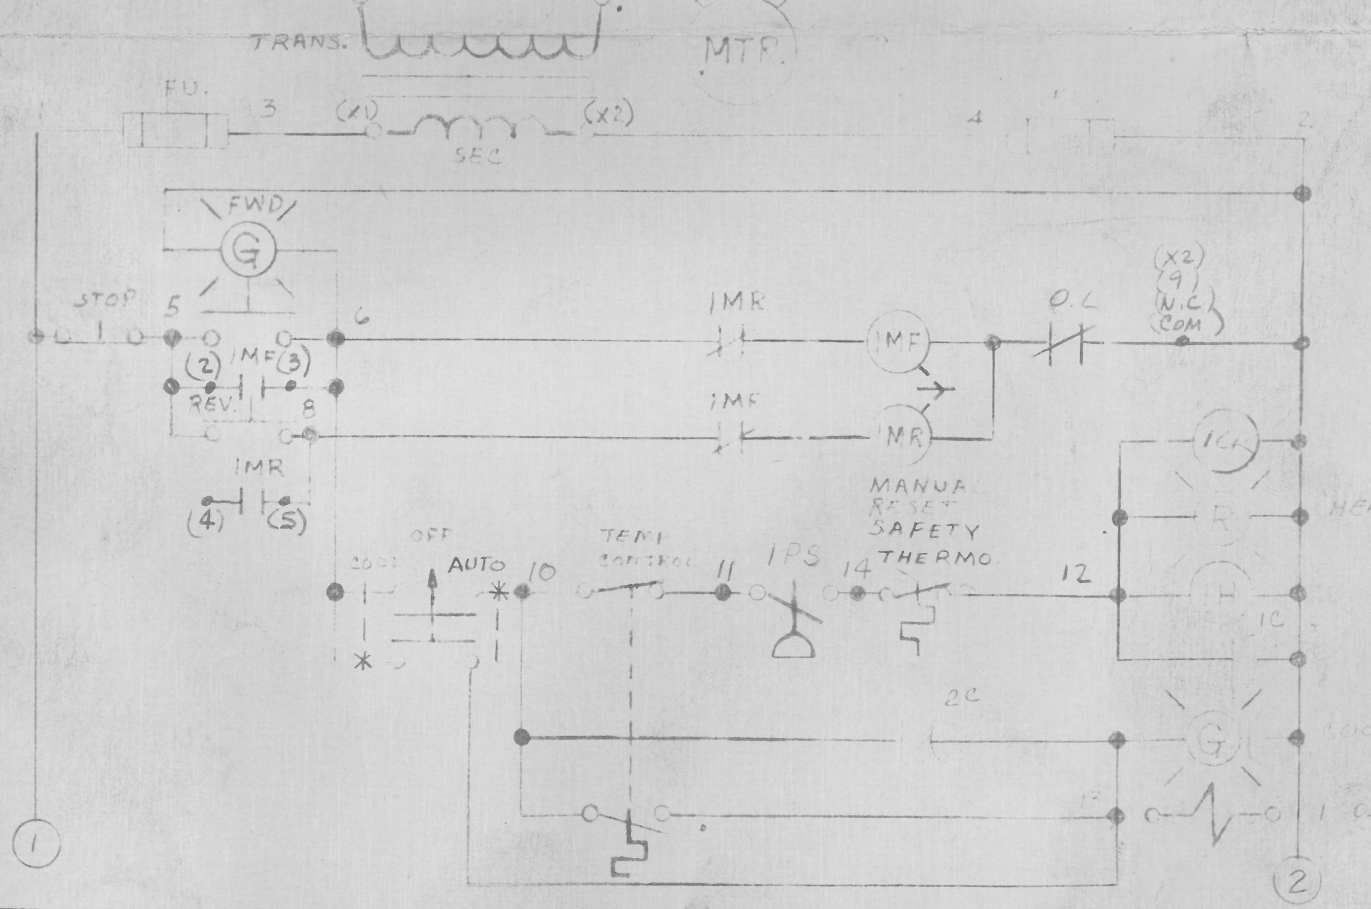


EQUIP. GRD.
SUPPLIED BY USER

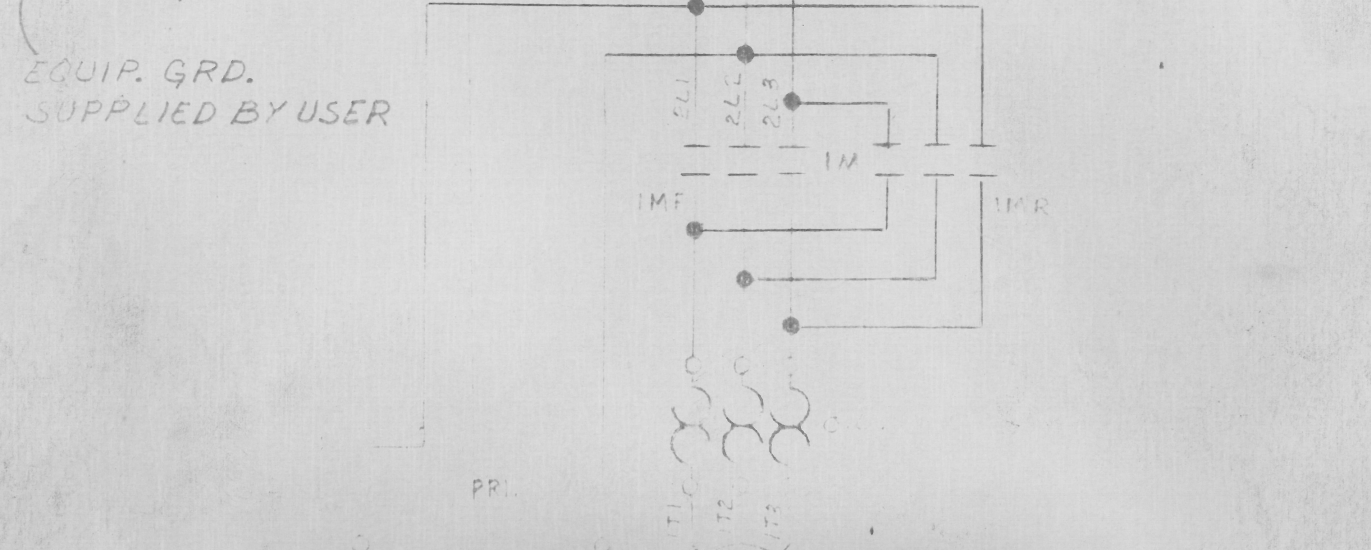

HEATER AMP @ VOLTAGE

KW	208	240	380	415	480	600
12	33.3	28.8	18.2	16.7	14.4	11.5
18	49.9	43.3	27.3	25.0	21.6	17.3
24	66.6	57.7	36.4	33.3	28.8	23.1
36	99.9	86.6	54.7	50.0	43.2	34.7

MOTOR AMP @ VOLTAGE

HP	208	230	380	415	480	575
1/2	2.3	2.1	1.2	1.0	0.8	0.8
3/4	3.2	2.8	1.7	1.5	1.4	1.4
1	4.1	3.6	2.2	2.0	1.8	1.8
1 1/2	6.1	5.2	3.0	2.7	2.4	2.1
2	8.1	6.9	4.3	3.7	3.4	2.7
3	12.1	10.6	6.0	5.3	4.9	3.9

TYPE	SYM.	ASSEM.
K9 FUSE	50,000	
K5 FUSE	50,000	
100 AMP FRAME CIRCUIT BREAKER	14,000	15,000
225 AMP FRAME CIRCUIT BREAKER	22,000	25,000

REV. ① ADDED ICR COIL (WAS MISSING) 4/25/80
② ADDED STARTER TERMINAL IDENTITY (*) 1/31/82

STERLING, INC.
MILWAUKEE, WIS.

TITLE ELEMENTARY DIAGRAM PANEL LAYOUT

DR CH'K DATE SCALE DWG. NO.
CFS 2/80 4 B692-05225