



ZX165U Robot

THE FLEXIBLE HEAVY-DUTY ROBOT

The ZX165U robot features a wide motion range and is suitable for a variety of applications, from spot welding to material handling.

ZX165U Overview:

Payload	165 kg
Max.Reach	2,651 mm



Applications:


- | | |
|----------------------------------|---------------------------------------|
| Assembly | Friction Spot Joining |
| Machine Tending | Material Handling |
| Material Removal | Sealing / Dispensing |
| Spot Welding | |

DATA DOWNLOAD

- Brochure
- Specifications
- Installation & Connection Manual

MOTION RANGE & DIMENSIONS

Click on the drawings below to view. Dimensions shown are in (mm).

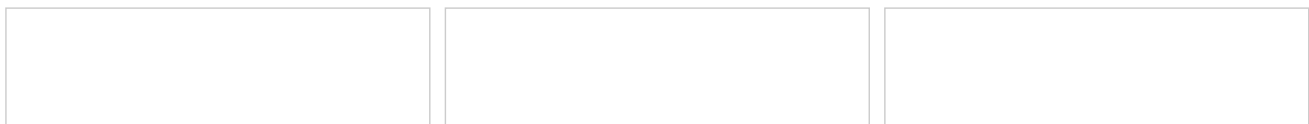



Click here or call (855) 855-1414

ROBOT SEARCH



share



Products

Robots

Small - Medium Payloads
Large Payloads
Extra Large Payloads
Clean

Dual Arm SCARA
Medical & Pharmaceutical
Painting
Palletizing

Pick & Place
Welding - Arc
Welding - Spot
Retired Models

Follow Us

Facebook
Twitter

Controllers

Universal Controllers
E Controllers
F Controllers
Clean Controllers
Paint Controllers

Other Products

Software Tools
Simulation & OLP
Vision Systems
Peripherals
Robot Transport Units

[Featured Video](#) [Robotics News & Events](#)
[About](#) [Careers](#) [Contact](#)

[Robotics Sitemap/ CSF](#)



Our Products