



Die Cast Machinery, LLC Inventory number: 4436

We offer for sale, subject to prior sale and the terms listed below:

Used Tool-temp 9 kw in water mode 3 kw in oil mode KW Single Zone Portable Hot Water Process Heater Temperature control Unit

Model: TT-188

Features Tool-Temp MP-888 Self-Optimizing, Electronic Microprocessor controller with digital display of set and actual value

Status: Sold

Specifications:	Metric / U.S. Standard
Main Heater Power (in oil operation mode):	3 kW / 3 kW
Main Heater Power (in water operation mode):	9 kW (selectable 3, 6 or 9 kw) / 9 kW (selectable 3, 6 or 9 kw)
Pump Motor Size:	.75 kW / 1 HP
Flow Rate/Maximum Pressure:	75 liter per minute/4.5 BAR / 19.8 Gallons/64 PSIG
Negative Pressure Capable/Rating:	Yes, Maximum vacuum 8 meters H2O water column / Yes, Maximum 314 inches of water column
Maximum Operating Temperature (in oil mode):	150 Celsius / 302 Fahrenheit
Maximum Operating Temperature (in water mode):	90 Celsius / 194 Fahrenheit
Cooling Capacity (via water cooled heat exchanger):	18 kw / 61,400 BTU/Hour
Process Connection size/type:	3/8 inch NPT / 3/8 inch NPT
Full Load Amps @ 460/3/60	12.2 Amps / 12.2 Amps
Approximate Weight:	55 kg / 121 pounds
Overall Size (L x W x H):	670 x 260 x 650 mm / 26 x 10 x 26 inches

Features & Accessories:

Negative Pressure Leak-Stop Mode Available; Maximum vacuum 8 mH2O water column or 314 inches of water column
Unit can run in either Hot Water Mode or Hot Oil Mode

All Process Fluid Components of Stainless Steel or Bronze to

Sealless Pump manufactured from Bronze for long life

Self-Optimizing Temperature Control Unit with Digital Display of the set and actual temperature with High Precision regulation in 1/10 degree range

Terms of Sale:


Price: [request quotation](#)

Shipping Terms: F.O.B. Warehouse

Product Photos:

Click on any image for a larger view



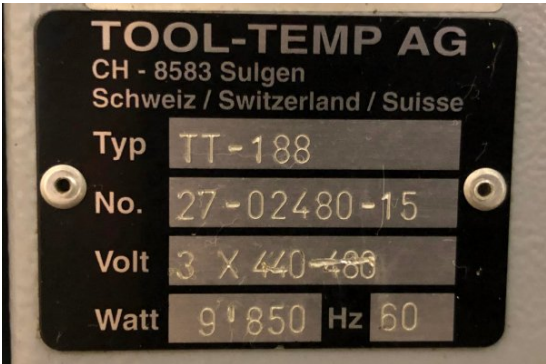

Description: Used, Tool-temp Model TT-188 9 kw in water mode 3 kw in oil mode KW Single Zone Portable Hot Water Process Heater Temperature control Unit For Sale, Features include: Negative Pressure Leak-Stop Mode Available; Maximum vacuum 8 mH2O water column or 314 inches of water column, Unit can run in either Hot Water Mode or Hot Oil Mode, All Process Fluid Components of Stainless Steel or Bronze to , Sealless Pump manufactured from Bronze for long life, Self-Optimizing Temperature Control Unit with Digital Display of the set and actual temperature with High Precision regulation in 1/10 degree range, , MP-888 Controls, Second Hand, DCM-4436

PURCHASER'S (Buyer's) RESPONSIBILITY AND INDEMNITY: Used machines, equipment or any part thereof, may not incorporate approved activating mechanisms, operator safety devices or safety guards as required by OSHA or otherwise. It shall be a Purchaser's (Buyer's) responsibility to ensure that any and all merchandise or equipment purchased from Die Cast Machinery, LLC or its affiliates is installed and operated in a proper and safe manner. Purchaser (Buyer) also acknowledges that it may have to install or change guards, safeties, warnings or other components to ensure that the merchandise or machines purchased will conform to all laws, codes, regulations, ordinances, statutes, insurance requirements and industry standards. Purchaser agrees to defend, indemnify and hold harmless Die Cast Machinery, LLC from and against all suits, claims, costs, damages and expenses, including, but not limited to, reasonable attorneys' fees, arising out of, or in connection with, the transportation, purchase, ownership, or use of the merchandise or equipment sold hereunder. Information has been obtained from sources deemed reliable, buyers should avail themselves of the opportunity to inspect the items before purchase.